

GB150 ^{Lithium} **4000A** 12V | **10.0L+**
Gas & Diesel

Lead Acid
Wet Gel MF EFB AGM
Auto | Marine | RV | Powersport | Lawn & Garden

Genius **BOOSTPRO** Jump Starter™



NOCO
12V
Professional™

Safely Jump Start A Dead Battery In Seconds.™

For High-Displacement Gas And Diesel Engines In Cars, Trucks, Boats, Commercial Vehicles, Equipment And More.

Ultra-safe, ultra-compact, rugged, and portable lithium-ion jump starter. Features **spark proof technology** and **reverse polarity protection**. Ideal for the widest range of engines, including **gas/diesel 10.0L+**. Equipped with an advanced **12.1V voltmeter**. Provides **remote power** with 12V plug (incl) for tire pumps, inverters, & phone chargers.



UltraSafe™

Protects against reverse polarity, sparks, over-charging, over-current, open-circuits and over-heating.

80X

Jump Starts Per Charge

Full power to jump start a vehicle up to 80 times in one charge. Compatible with gas & diesel engines 10.0L+.



2.1A

USB

Recharge virtually any USB device (smartphones, tablets). Recharge the unit from any USB port or 12V charger.

10XLED

500 Lumen Ultra-bright LED flashlight for visibility and with 7 modes, including SOS and emergency strobe.

For **Gas & Diesel** Engines **10.0L+** Safe To Use On Engines Of Any Size.

The NOCO Company
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co


NOCO
Since 1914

2X More Power,

A Fraction Of The Size.

+ Holds Charge 4 Times Longer

Available Starting Power (joules) = Power (w) X Time (sec)



VS



Genius **BOOSTPRO™**

Leading Traditional Jump Starter

7.5lbs
22500 joules^{3S}

18lbs
6950 joules^{3S}

4X Fast Recharge

Go From Zero To Jump Starting In 15 Minutes, Fully Charges In Just Over 3 Hours.

Voltmeter
12.9_V

Built-In Voltmeter Reads The Voltage Of The Vehicle's Battery For Enhanced Diagnostics And Troubleshooting.

Manual Override is a special feature designed for rare situations when a vehicle's battery is below 2-volts. Simply press and hold the manual override button for 3 seconds, until the Boost LED starts flashing, to enter into the mode. Press the button again (Or the power button) to exit Manual Override. This mode should be used cautiously, as Manual Override disables safety protection while enabled.



Technical Specifications

Internal Battery:	Lithium Ion	Micro USB (Input):	5V, 2.1A
Peak Current Rating:	4000A	USB (Output):	5V, 2.1A
Joules ^{3S} :	22500+	Housing Protection:	IP65 (w/ Ports closed)
Operating Temperature:	-30°C to +50°C	Cooling:	Natural Convection
Charging Temperature:	0°C to +40°C	Dimensions (LxWxH):	12.3 x 7 x 2.7 in
Storage Temperature:	-20°C to +50°C	Weight:	7.5 Pounds
12V (Input/Output):	12V, 5A IN / 12V, 15A OUT	Lumens (LEDs):	500L



What's In The Box

- GB150 Lithium Jump Starter w/HD Battery Clamps
- Micro USB Cable
- 12V Female Plug (OUT)
- 12V Male Plug (IN)
- 12V XGC Cable
- User Guide & Information Guide and Warranty

Recharging a GB150

(for reference, results may vary)

USB Charger Rating	Charging Time	12V Fast Charge
.5A	45hr	5A @ 12V (60W)
1A	22hr	2-3hr
2A	11hr	

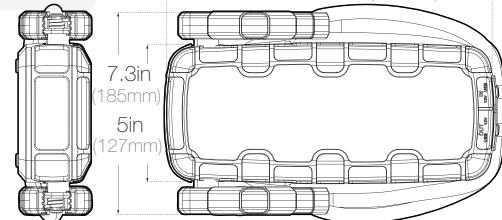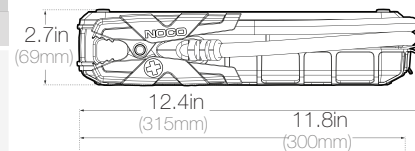

Retail Packaging:

Dimensions: 9.2"x16.9"x4.02"

Weight: 7.5lbs

UPC: 0-46221-15006-3

Inner Carton:

Dimensions: 4.5"x9.7"x17.5"

Weight: 8lbs

Master Carton:

Dimensions: 10.0"x18.2"x10.6"

Weight: 17.5lbs

Quantity: 2

UCC: 10046221150060

Units Per Pallet: 100 Units

CE FC

RoHS

The NOCO Company
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO
Since 1914