


FLOODED DEEP CYCLE BATTERY

6 EHG 31P

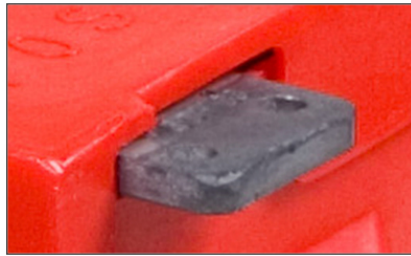

Series	4000	Warranty	See Warranty Terms
Volts	6	BCI	SPEC
Cells	3	Plates/Cell	31
Terminal Type	Flag RR		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1549			
Marine Crank Amps (MCA) 32°F / 0°C	1936			
Reserve Capacity (RC @ 25A)	984 Minutes			
Reserve Capacity (RC @ 75A)	328 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	545 AH	5.45 A
@ 72 Hour Rate	517 AH	7.18 A
@ 50 Hour Rate	488 AH	9.76 A
@ 20 Hour Rate	410 AH	20.5 A
@ 15 Hour Rate	390 AH	25.97 A
@ 10 Hour Rate	361 AH	36.08 A
@ 8 Hour Rate	353 AH	44.08 A
@ 5 Hour Rate	324 AH	64.78 A
@ 1 Hour Rate	164 AH	164 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.


Specifications

	Weight	60 kg	132.5 lbs
	Length	52.7 cm	20.75"
	Width	20.3 cm	8"
	Height Inc. Term.	32.4 cm	12.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	44 mm	1.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Molded	

Cycle Life vs. Depth of Discharge

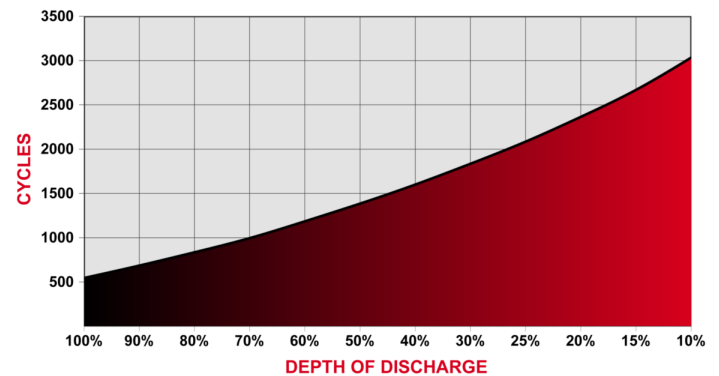

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Rev.#3 | May 2018