




Stark Energy Batteries // SRK-125

Canada Tough – 365 Days a Year

	Nominal Capacity
	125 Ah
	Voltage
	12V
	Electrolyte
	AGM
	Weight
	66lb
	Terminal Type
	Internal Thread
	Warranty
	1 years



STARK ENERGY BENEFITS:

- Sealed lead acid battery classified as non-hazardous material per IMDG
- Can ship via Purolator or DHL and approved for air transport by IATA
- Individually boxed for safe transport right to your work site
- Every battery is equipped with lifting handles
- Internal threaded posts, hardware, and terminal covers included

Stark Energy AGM batteries are built to power equipment 365 days a year. Unlike most AGM standby batteries, Stark Energy comes from a high cycling lineage. Designed specifically for solar and EV applications, they can withstand repeated cycles of up to 300 at 100% discharge and many times that at shallower cycle depth.

The advanced AGM design and spill-proof construction allow for multiple operating positions (except upside down). They can also operate at -40C. Best of all, these batteries are maintenance-free. Over 20,000 Stark batteries are reliably powering equipment all over Canada – don't settle for anything else.



Stark Energy Batteries // SRK-125

Canada Tough – 365 Days a Year

PERFORMANCE SPECIFICATIONS

Nominal Voltage		12 Volts	
Nominal Capacity		25°C	
1 Amp rate		125 Ah	
100-hr.		118 Ah	
20-hr.		105 Ah	
10-hr.		100 Ah	
Internal Resistance (approx.)		5mΩ	
Resting Discharge Rate		31.58 V	
3 Months	6 Months	12 Months	
91%	82%	64%	
Charge Method		(Constant Voltage)	
Cycle Use (Repeating Use)			
Initial Current		27 A or similar	
Control Voltage		14.6 - 14.8	
Float Use (Control Voltage)		13.6 - 13.8	
AGM Operational Temperature			
Discharge		-40°C to 60°C	
		-40°C to 50°C	
AGM Storage Temperature		-40°C to 45°C	

CAPACITY FACTORS WITH DIFFERENT TEMPERATURES (20 HOUR RATE)

40°C	25°C	0°C	-20°C
102%	100%	85%	65%

BATTERY CARE & STORAGE


CARE:

- Active users charge daily; occasional users charge battery before any outing, after active use or every 90 days if no use
- Only use with a specified charger. Only use appropriate charger to charge AGM batteries as charging rates differ.
- Never use an automotive or wet type charger on an AGM battery
- Top Charge your battery frequently and/or leave on a charger/maintainer.

STORAGE:


- Batteries should always be stored fully charged in a cool and dry place to maintain maximum service life
- Depending on storage temperatures, batteries hold their charge for 3 to 9 months until recharge is necessary. Above 300C (860F), recharge at 9 months. Above 400C (1040F), recharge at 3 months. Do not store above 400C (1040F)
- If a battery is stored for 9 months or longer without being charged, its service life may be shortened.
- Never store batteries in a sealed environment or incorporate into a sealed structure/enclosure without adequate ventilation

DIMENSIONS

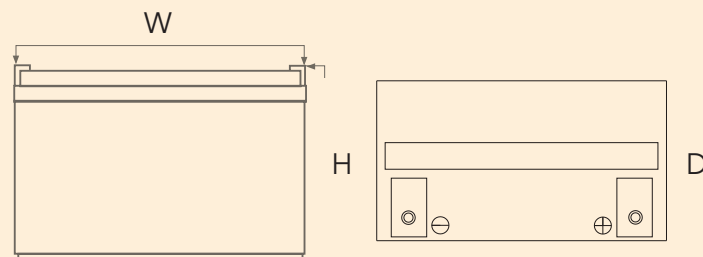


Dimensions (W x H x D)	12.9 x 8.7 x 6.8"
	(32.8 x 22.2 x 17.2cm)
Weight	66 lbs (30 kg)

OPEN CIRCUIT VOLTAGE VS. RESIDUAL CAPACITY

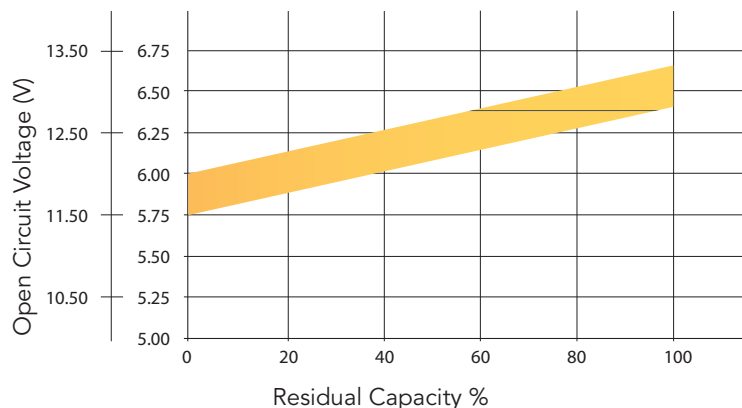

LIFE CHARACTERISTICS OF CYCLE USE

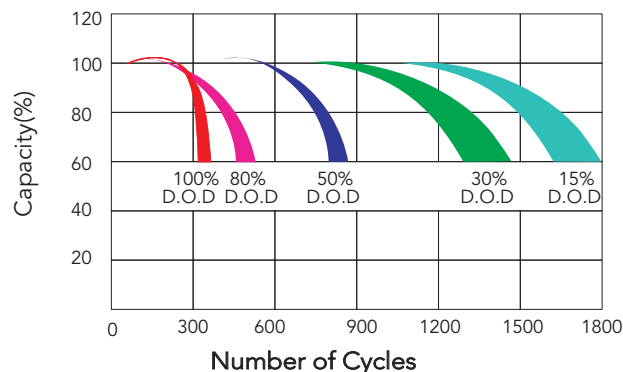

Design and specifications are subject to change without notice. Stark Energy is a registered trademark TM. All other trademarks are property of their respective owners. Contact Stark Energy to obtain the latest product manuals before using any Stark Energy products.



t. 1.866.258.0110
f. 866.437.5531
e. sales@hespv.ca
w. hespv.ca

starkenergy.ca