



L6



Series	VRLA AGM-S	Warranty	See Warranty Terms
Volts	12	Design	8D
Cells	6		
Terminal Type	L6		

Charge | Discharge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	60 A
Maximum Charge Current	90 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	3.0 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1010
Capacity Affect by Temperature	40°C (104°F) 25°C (77°F) 0°C (32°F) -15°C (5°F)
	102% 100% 85% 65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	380 AH	3.8 A
@ 20 Hour Rate	300 AH	15.0 A
@ 10 Hour Rate	285 AH	28.5 A
@ 5 Hour Rate	255 AH	51.0 A

Cut Off Voltage	Constant Current Discharge
1.75 VPC	1 hr 2 hr 3 hr 5 hr 8 hr 10 hr
	165 98.2 77.4 52.3 35.7 28.9


Specifications

Weight	78 kg	172 lbs
Length	522 mm	20.55"
Width	269 mm	10.59"
Height Incl. Term.	248 mm	9.76"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Rope

Cycle Life vs. Depth of Discharge

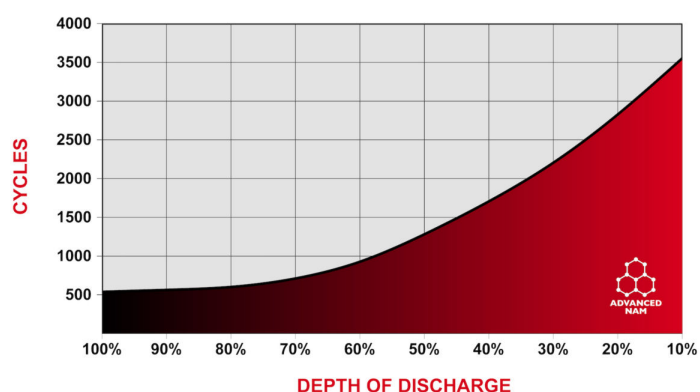

Capacity vs. Temperature

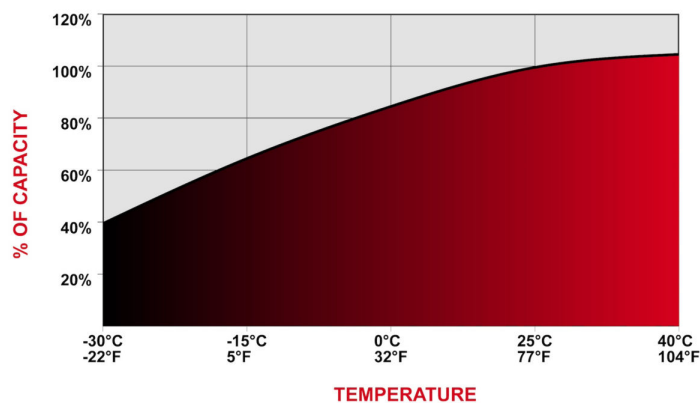

Detailed Illustration

